


EXTRA HEAVY DUTY
TOP FEED MACHINE

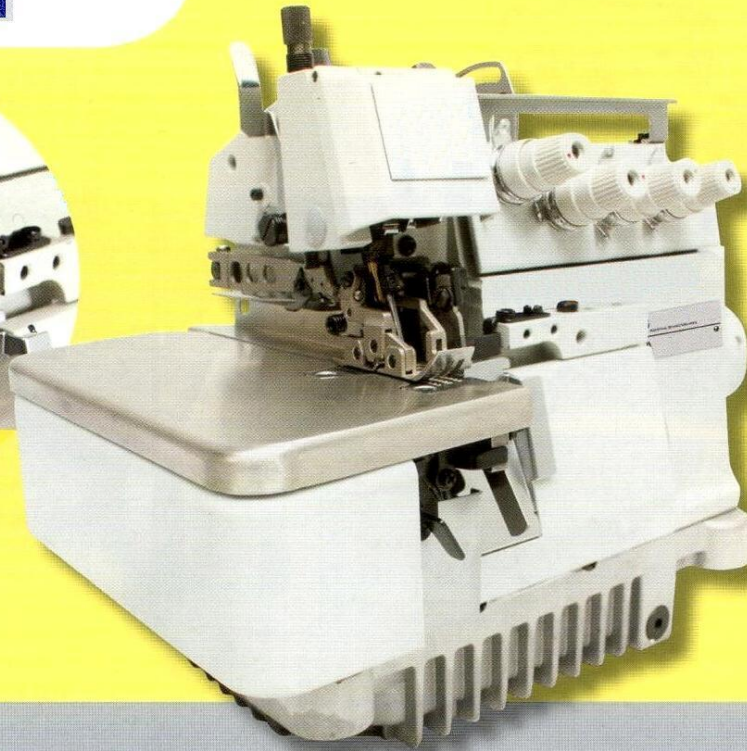

OVERLOCK MACHINES WITH TOP AND DIFFERENTIAL FEED

High speed two needle and safety stitch overlock machines with top feed combined with differential feed.

Máquina overlock, 5-hilos con puntada de seguridad, de alta velocidad. Equipada con arrastre superior combinado con transporte diferencial inferior.

Hochleistungs-Zweinadel Safetymaschinen mit vor den Nadeln liegendem Obertransport kombiniert mit einem Differentialtransport.

Surjeteuse à grande vitesse à deux aiguilles et point safety, griffe supérieur devant les aiguilles combinée avec entraînement différentiel.

TECHNICAL SPECIFICATIONS

MACHINE SPEED
max 5500 spm

STITCH LENGTH
2,5 - 5 mm

FEED TYPE
differential feed

BOTTOM DIFFERENTIAL FEED RATIO
1:0.7 - 1:2

LONGITUDE STROKE OF TOP FEED DOG
2.7 - 7 mm

PRESSER FOOT LIFT
max 8 mm

NEEDLE TYPE
B-27

NEEDLE TYPE
B-64

SPECIFICATIONS

STITCH TYPE	NUMBER OF NEEDLES	NUMBER OF THREADS	NEEDLE DISTANCE MM	OVEREDGING (MM)		STITCH LENGTH MM	DIFFERENTIAL FEED RATIO	PRESSER FOOT LIFT (MM)	MAX. SEWING SPEED
				WIDTH	WIDTH OVERAL				
	2	4	2	4	6	4	1:0.7 - 1:2	6	5500
	2	5	5	5	10	4	1:0.8 - 1:2	6	5000
	2	5	5	5	10	4	1:0.7 - 1:2	6.5	5000
	2	5	5	5	10	5	1:0.8 - 1:2	8	5000
	2	5	5	5	10	5	1:0.7 - 1:2	8	5000
	2	5	5	5	10	5	1:0.8 - 1:2	8	5000